

# Epson ELP-CB03 Cable Management & Connection Box




## Overview

### KEY FEATURES & BENEFITS

- Centralised Control Box – manage your Epson short-throw or ultra-short-throw projector (power, AV mute, volume, sources; wall mounted, no remote control needed)
- Optimised for connectivity – supports an array of sources, including 2 HDMI inputs for displaying content from high-definition devices, connect the latest MHL-enabled smartphone or tablet via MHL cable
- Consolidated Cable Management – convenient wall placement helps avoid potential hazards
- Increased Flexibility – use as an extension box to expand the range of your cables
- Easy Operation – large, individual source buttons intuitively match Epson projector inputs, including a new direct source button for HDMI3
- Amplify Instruction – optional speakers boost sound and ensure the entire class can hear the lesson

## Centralised Control Box

The Epson ELP-CB03 Connection and Control Box is a solution that offers extensive control of multimedia sources connected to Epson's wall-mounted short-throw and ultra-short-throw classroom projectors.

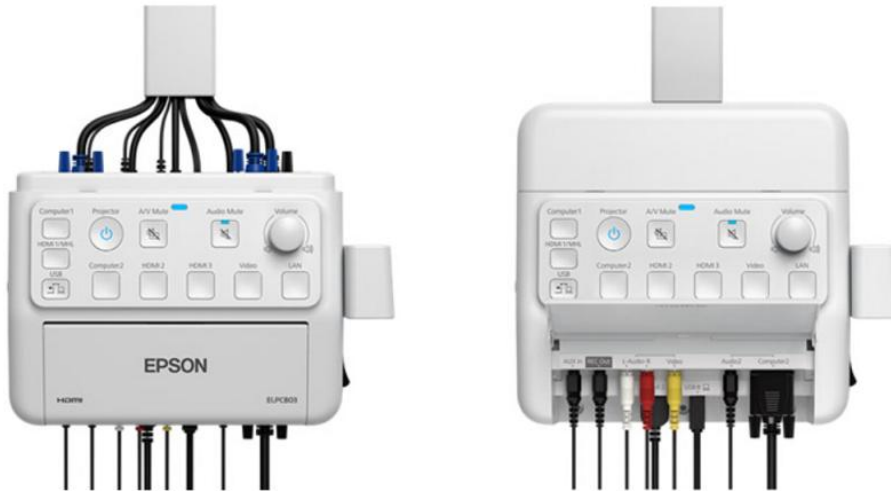

The ELP-CB03 is a wall-mountable control box which features large, easy to use control buttons and a cable cover that creates a clean, organised look to help avoid cable chaos. The control box is designed to mount on the wall next to the projected image, making it easily accessible to educators and enabling them to change sources or adjust volume with the press of a button, eliminating the need for a projector remote control.

## Connectivity Configurations



Side View

## Specification

<b>PRODUCT TYPE</b>	Projector Cable Management
PRODUCT NAME	Epson ELP-CB03 Cable Management & Connection Box
PRODUCT CODE	V12H927053
Whats in the Box	Epson ELPCB03, Power Cable, AC Adapter, AC Adapter holder, Interactive Pen Holder, Cable Cover with screw, HDMI Cable Clamp, User Guide

### I/O

INPUT	Video	2 x VGA Composite Video 2 x HDMI (1 x MHL) USB-A USB-B
	Audio	4 x Stereo mini jack (3.5mm) RCA Connector (L and R) Mic In (6.3mm)
OUTPUT	Video	2 x VGA Composite Video 2 x HDMI USB-A USB-B
	Audio	2 x Stereo mini jack (3.5mm)
CONTROL		RS-232C (9 pin)

### GENERAL

OPERATING TEMPERATURE	5°C to 35°C
OPERATING HUMIDITY	20% TO 80% RH
DIMENSIONS	230 W x 83 D x 226 H mm (with cover)
WEIGHT	1.2kg

### POWER

POWER SUPPLY VOLTAGE	100 - 240V AC/DC
POWER FREQUENCY	50/60Hz
AC ADAPTOR OUTPUT VOLTAGE	DC 12V
POWER CONSUMPTION	12W
POWER CONSUMPTION (Standby Mode)	0.1W

### WARRANTY

STANDARD WARRANTY

1  
year